


# S-SDK-BTS256

<http://www.gigahertz-optik.de/en-us/product/S-SDK-BTS256>

Product tags:

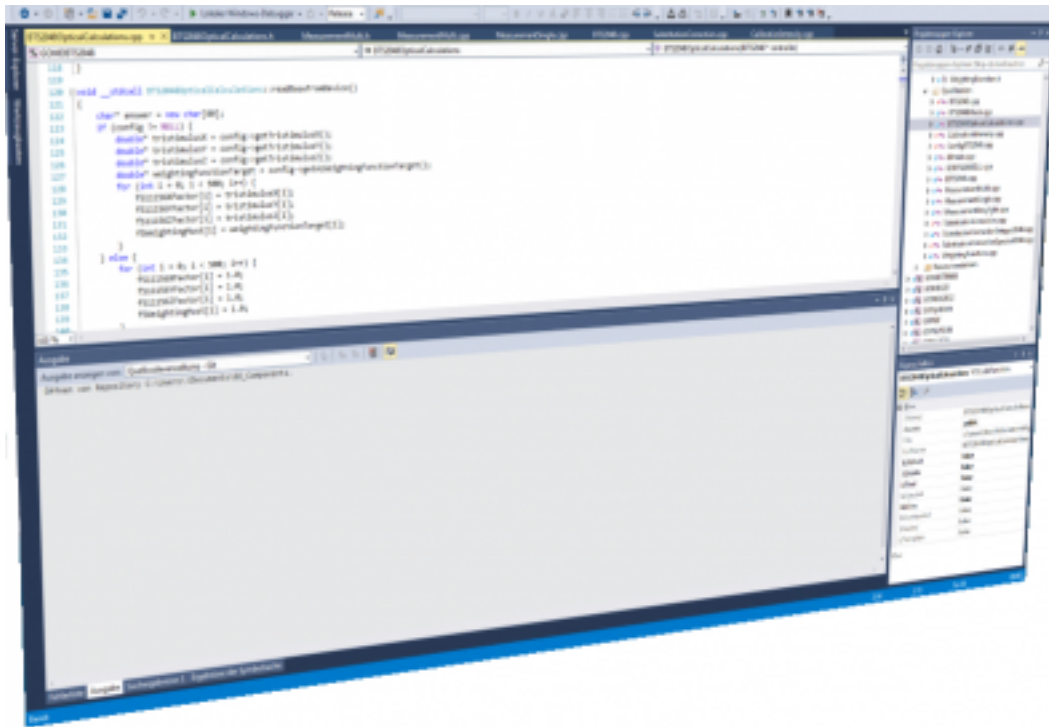

## Description






### Software Development Kit









Gigahertz-Optik offers programmers the S-SDK-BTS256 Software Development Tool. The SDKs simplify integration of the BTS256 and its variants in own software.

The SDK can be used with C/C++, LabView from National Instruments and .NET from Microsoft. Beside the .dll's and LabView VI's a comprehensive documentation is delivered.

The programmer is able to controll all functions of the device like: measurement routines, complexe evaluations, re-calibrations, etc.

### Configurable with

Produktname	Product Image	Description	Show product
BTS256-LED		<p>Compact Bi-Tec measurement device for the measurement of total luminous flux of single LEDs.</p> <p>Features: Cone-shaped measurement port with implemented integrating sphere, auxiliary lamp for substitution correction, spectral radiant power, color temperature, CRI, chromaticity coordinates, etc.</p>	<a href="http://www.gigahertz-optik.de/en-us/product/BTS256-LED">http://www.gigahertz-optik.de/en-us/product/BTS256-LED</a>
BTS256-LED-DA		<p>Compact Bi-Tec measurement device for the measurement of illuminance and luminous flux.</p> <p>Features: Bajonett adapter with diffusor for the BTS256-LED, +/- 30° cosine corrected field of view, spectral radiant power, color temperature, CRI, chromaticity coordinates, etc.</p>	<a href="http://www.gigahertz-optik.de/en-us/product/BTS256-LED-DA">http://www.gigahertz-optik.de/en-us/product/BTS256-LED-DA</a>
BTS256-LED-IB		<p>Compact Bi-Tec measurement device for the measurement of ILED-B.</p> <p>Features: Bajonett adapter with ILED-B geometry according CIE 127, spectral data, color temperature, CRI, chromaticity coordinates, etc.</p>	<a href="http://www.gigahertz-optik.de/en-us/product/BTS256-LED-IB">http://www.gigahertz-optik.de/en-us/product/BTS256-LED-IB</a>
ISD-21-BTS256-LED		<p>System for the luminous flux and light color measurement of individual <math>2\pi</math> light emitting diodes up to 63.5mm.</p> <p>Features: Integrating sphere with 21 cm diameter and auxiliary lamp, compact spectral light meter with Bi-Tec sensor for accurate measurement of the luminous flux, spectral radiant power, CCT, CRI, chromaticity coordinates, etc.</p>	<a href="http://www.gigahertz-optik.de/en-us/product/BTS256-LED-ISD-21">http://www.gigahertz-optik.de/en-us/product/BTS256-LED-ISD-21</a>
ISD-50-BTS256-LED		<p>System for the luminous flux and light color measurement of individual <math>2\pi</math> light emitting diodes up to 100mm.</p> <p>Features: Integrating sphere with 50cm diameter and auxiliary lamp, compact spectral light meter with Bi-Tec sensor for accurate measurement of the luminous flux, spectral radiant power, CCT, CRI, chromaticity coordinates, etc.</p>	<a href="http://www.gigahertz-optik.de/en-us/product/BTS256-LED-ISD-50-V01">http://www.gigahertz-optik.de/en-us/product/BTS256-LED-ISD-50-V01</a>

Produktname	Product Image	Description	Show product
ISD-50HF-BTS256-LED		<p>System for the luminous flux measurement of <math>4\pi</math> (optional <math>2\pi</math> and <math>4\pi</math>) light fixtures inside a sphere.</p> <p>Features: Integrating sphere with 50cm hemispherical shell for opening and closing and auxiliary lamps. Light meter with Bi-Technology sensor for accurate measurement of luminous flux, spectral radiant power, CCT, CRI, chromaticity coordinates, etc.</p>	<a href="http://www.gigahertz-optik.de/en-us/product/ISD-50HF-BTS256-LED">http://www.gigahertz-optik.de/en-us/product/ISD-50HF-BTS256-LED</a>
ISD-100HF-BTS256-LED		<p>System for the luminous flux measurement of <math>2\pi</math> and <math>4\pi</math> light fixtures inside a sphere.</p> <p>Features: Integrating sphere with a 1000 mm diameter, hemispherical shell for opening and closing, auxiliary lamp. Light meter for accurate measurement of luminous flux, spectral radiant power, CCT, CRI, chromaticity coordinates, User software, etc. Options: quadripole test sockets.</p>	<a href="http://www.gigahertz-optik.de/en-us/product/BTS256-LED-ISD-100HF-V01">http://www.gigahertz-optik.de/en-us/product/BTS256-LED-ISD-100HF-V01</a>
ISD-100HF-V02-BTS256-LED		<p>System for the luminous flux measurement of <math>2\pi</math> and <math>4\pi</math> light fixtures inside a sphere.</p> <p>Features: Integrating sphere with a 1000 mm diameter, extra measurement ports for <math>2\pi</math> luminaires with diameters of up to 254mm and auxiliary lamp. Light meter for accurate measurement of luminous flux, spectral radiant power, CCT, CRI, chromaticity coordinates, User software, etc.</p>	<a href="http://www.gigahertz-optik.de/en-us/product/BTS256-LED-ISD-100HF-V02">http://www.gigahertz-optik.de/en-us/product/BTS256-LED-ISD-100HF-V02</a>
GB-GD-360-RB40-2-BT S256-LED		<p>Goniometersystem for the luminous flux and light color measurement of individual <math>2\pi</math> light emitting diodes with an adjustable measurement distance up to 2000mm.</p> <p>Features: Goniometer, compact spectral light meter with Bi-Tec sensor for accurate measurement of the luminous flux, spectral radiant power, CCT, CRI, chromaticity coordinates, IES, EULUMDAT, etc.</p>	<a href="http://www.gigahertz-optik.de/en-us/product/BTS256-LED-GB-GD-360-RB40-2">http://www.gigahertz-optik.de/en-us/product/BTS256-LED-GB-GD-360-RB40-2</a>
BTS256-E		<p>Mobile meter for the measurement of illuminance and light color.</p> <p>Features: Mobile meter, datalogger, splash-proof, spectral irradiance, photopic, scotopic and melanopic illuminance, spectral irradiance, CCT, CRI, color coordinates, Option: WiFi, etc.</p>	<a href="http://www.gigahertz-optik.de/en-us/product/BTS256-E">http://www.gigahertz-optik.de/en-us/product/BTS256-E</a>
BTS256-E WiFi		<p>Mobile meter for the measurement of illuminance and light color.</p> <p>Features: WiFi, Mobile meter, datalogger, splash-proof, spectral irradiance, phot. and scot. illuminance, spectral irradiance, CCT, CRI, color coordinates, etc.</p>	<a href="http://www.gigahertz-optik.de/en-us/product/BTS256-E-WiFi">http://www.gigahertz-optik.de/en-us/product/BTS256-E-WiFi</a>
BTS256-EF		<p>Mobile meter for the measurement of illuminance, light color and flicker measurement.</p> <p>Features: Mobile meter, datalogger, splash-proof, Flicker measurement, spectral irradiance, photopic, scotopic and melanopic illuminance, spectral irradiance, CCT, CRI, color coordinates, Option: WiFi, etc.</p>	<a href="http://www.gigahertz-optik.de/en-us/product/BTS256-EF">http://www.gigahertz-optik.de/en-us/product/BTS256-EF</a>
BTS256-EF WiFi		<p>Mobile meter for the measurement of illuminance, light color and flicker measurement.</p> <p>Features: WiFi, Mobile meter, datalogger, splash-proof, Flicker measurement, spectral irradiance, phot. and scot. illuminance, spectral irradiance, CCT, CRI, color coordinates, etc.</p>	<a href="http://www.gigahertz-optik.de/en-us/product/BTS256-EF-WiFi">http://www.gigahertz-optik.de/en-us/product/BTS256-EF-WiFi</a>

Produktname	Product Image	Description	Show product
BTS256-PAR		<p>Mobile meter for the measurement of the photosynthetically active PAR irradiance.</p> <p>Features: Mobile meter, datalogger, splash-proof, measurement PAR, actinic spectra by the user, additional measurements: phot. and scot. illuminance, spectral irradiance, CCT, CRI, color coordinates, optin: WiFi, etc.</p>	<a href="http://www.gigahertz-optik.de/en-us/product/BTS256-PAR">http://www.gigahertz-optik.de/en-us/product/BTS256-PAR</a>
BTS256-PAR WiFi		<p>Mobile meter for the measurement of the photosynthetically active PAR irradiance.</p> <p>Features: WiFi, mobile meter, datalogger, splash-proof, measurement of photosynthetically active PAR irradiance, further actinic spectra can be defined by the user, additional measurements: phot. and scot. illuminance, spectral irradiance, color temperature, CRI, color coordinates, etc.</p>	<a href="http://www.gigahertz-optik.de/en-us/product/BTS256-PAR-WIFI">http://www.gigahertz-optik.de/en-us/product/BTS256-PAR-WIFI</a>
BTS256-HI		<p>Compact Bi-Tec measurement device for the measurement of dental polymerization lamps and cold light sources.</p> <p>Features: Measurement window with implemented integrating sphere, spectral radiant power, color temperature, CRI, chromaticity coordinates, etc.</p>	<a href="http://www.gigahertz-optik.de/en-us/product/BTS256-HI">http://www.gigahertz-optik.de/en-us/product/BTS256-HI</a>
S-BTS2048		Application software for BTS2048 variants.	<a href="http://www.gigahertz-optik.de/en-us/product/S-BTS2048">http://www.gigahertz-optik.de/en-us/product/S-BTS2048</a>

## Purchasing information

Article-Nr	Modell	Description
<b>Product</b>		
15298218	S-SDK-BTS256	Software Development Kit for the implementation of the BTS256 or variants into custom made software